

# RFID CEILING TILE ANTENNA FPA0-0.4R/9403



## ELECTRICAL

FREQUENCY:	433 MHz
GAIN:	0 dBiC
POLARISATION:	Right Hand Circular
BEAMWIDTH:	80° (Az) x 80° (Ei)
CROSS POLAR:	<3 dB
VSWR:	<1.5:1
POWER RATING:	5 W
FRONT TO BACK:	> 30 dB



## MECHANICAL

STANDARD FINISH:	Gloss White
MASS:	2.0 Kg / 4.4 lbs
TEMPERATURE:	-20° to +50°C
WIND LOADING:	N/A

## MOUNTING OPTIONS

KITS AVAILABLE:	N/A
Replaces Standard (600x600) Ceiling Tile	

GA: 9403-1      Issued: 030108  
 DIMENSIONS: mm [inches]      M

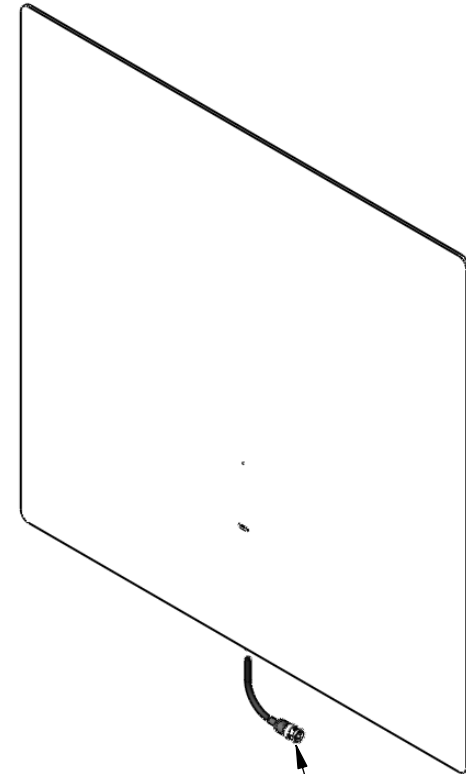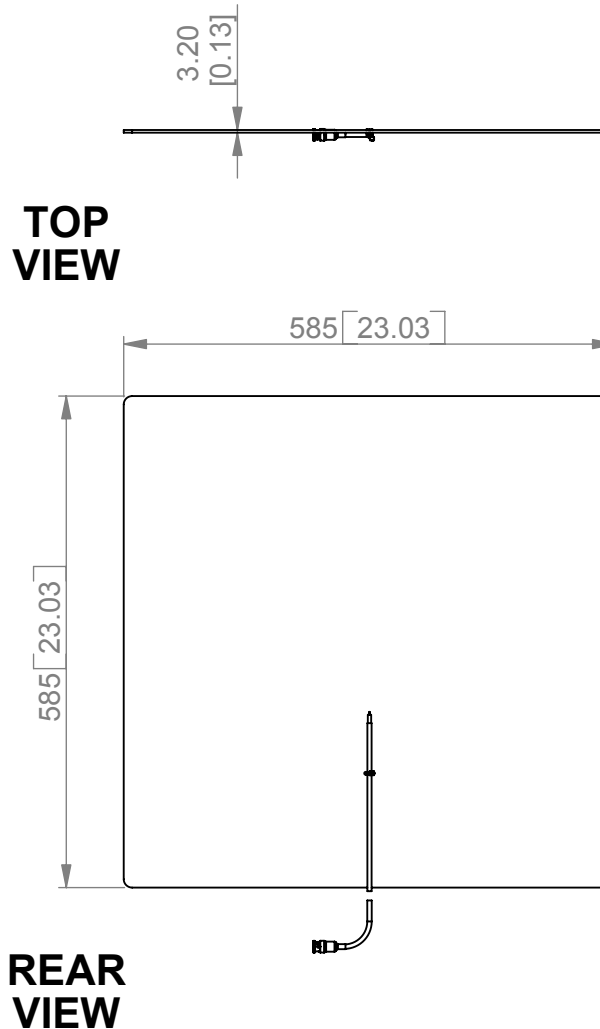

BNC (M) CONNECTOR  
WITH INTEGRAL  
1M RG223 CABLE.

ISOMETRIC  
VIEW

FPA0-0.4R/9403

European Antennas Ltd. has a policy of continuous development and therefore stress that the data contained on this sheet should be used for guidance only.

European Antennas Ltd. is part of the Cobham Antennas Division



Certificate No 9268

European Antennas Ltd  
 Lambda House, Cheveley  
 Newmarket, Suffolk, CB8 9RG, UK  
 Tel: +44 (0)1638 731888  
 sales@european-antennas.co.uk  
[www.european-antennas.co.uk](http://www.european-antennas.co.uk)