


EVD2-2460/086

Rugged Omni Antenna




Key Features


- Designed for WLAN Applications
- Suitable for Multiple Applications
- Suitable for Mobile Applications
- Compact
- Ground Plane Independent

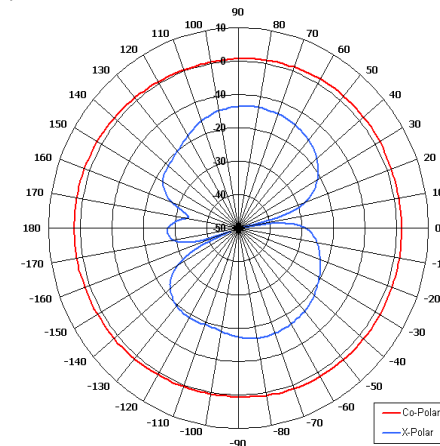

Azimuth Pattern

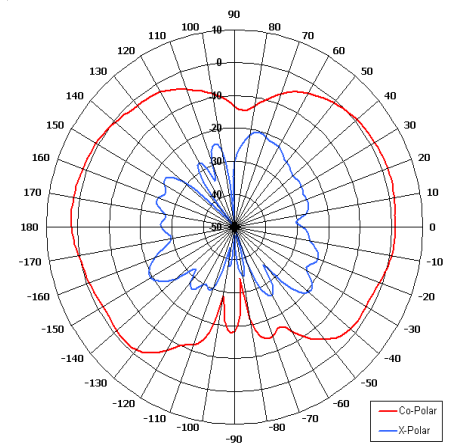

Elevation Pattern

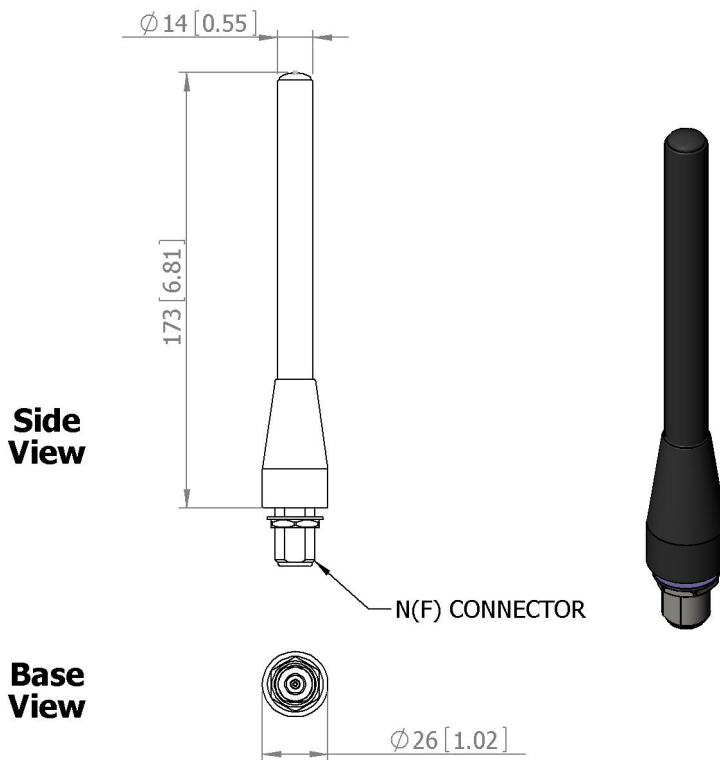

Side View

Base View

GA: 0086

ELECTRICAL

| | |
|---------------|-----------------------------|
| Frequency | 2.35 - 2.55 GHz |
| Gain | 2 dBi Nom |
| Polarisation | Linear (Vertical) |
| Beamwidth | 360° (Az) x 80° (El) Approx |
| Cross Polar | 15 - 20 dB Typ |
| VSWR | 1.5:1 2.0: 1 Max |
| Power Rating | 10 W |
| Front to Back | N/A |

MECHANICAL

| | |
|-----------------|--------------------------|
| Standard Finish | Matt Black |
| Mass | 150g (5.0 oz) |
| Temperature | -20° to +50°C |
| Wind Loading | 0.46kg(1.0lbs) at 100mph |

MOUNTING OPTIONS

| | |
|----------------|-----|
| Kits Available | N/A |
|----------------|-----|

See separate data sheets

ADDITIONAL NOTES

Issued 300410

Chelton Limited has a policy of continuous development and stress that the information provided is a guide only and does not constitute an offer or contract or part thereof. Whilst every effort is made to ensure the accuracy of the information contained in this brochure, no responsibility can be accepted for any errors or omissions.

The copyright of antenna designs and images is copyright protected and owned by Chelton Limited.
©Chelton Limited

For further information please contact:

Chelton Limited,
Lambda House, Cheveley,
Newmarket, Suffolk CB8 9RG, UK.
T: +44 (0)1638 732 177
E: newmarket.sales@chelton.com
W: www.chelton.com/microwave