

OA2-0.3-1.0V/1530

COBHAM

Omni Antenna

The most important thing we build is trust




Designed for IED Countermeasure Applications

Wide Band

High Power

Rugged

NATO Mounting Options Available

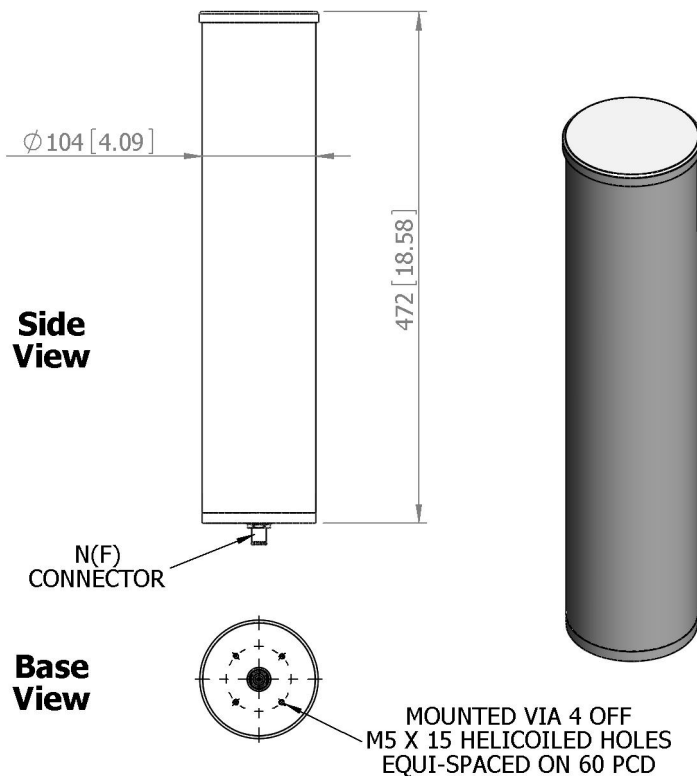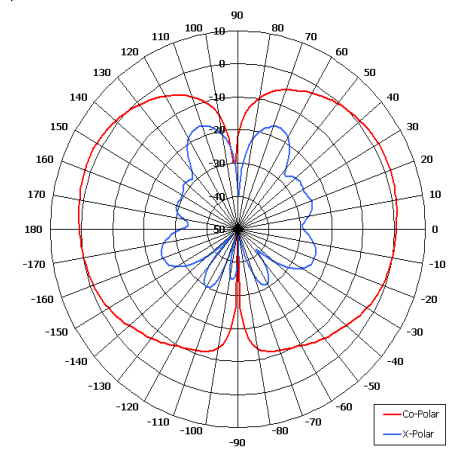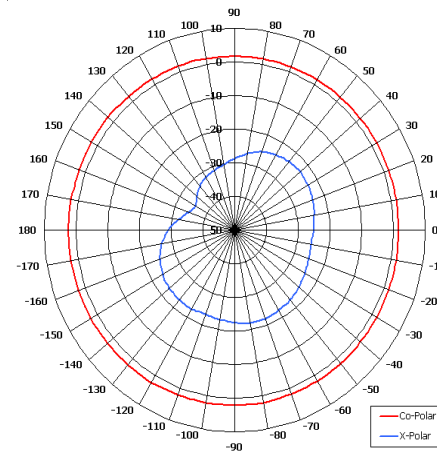

GA: 1530

ELECTRICAL

Frequency	300 - 1000 MHz
Gain	2.0 dBi Typ
Polarisation	Linear (Vertical)
Beamwidth	360° (Az) x 60° (El) Approx
Cross Polar	10 dB Max, >20dB Typ
VSWR	3.5:1 Max, >2:1 Typ
Power Rating	50 W
Front to Back	N/A

MECHANICAL

Standard Finish	Gloss White
Mass	1.1 Kg/2.42 lbs
Temperature	-40° to +60° C
Wind Loading	7.9 Kg/(17.5 lbs @ 100mph)

MOUNTING OPTIONS

Kits Available	N/A
See separate data sheets	

ADDITIONAL NOTES

Issued 050310

European Antennas Limited trading as Cobham Antenna Systems, Microwave Antennas

European Antennas Limited has a policy of continuous development and stress that the information provided is a guide only and does not constitute an offer or contract or part thereof. Whilst every effort is made to ensure the accuracy of the information contained in this brochure, no responsibility can be accepted for any errors or omissions.

The copyright of antenna designs and images is copyright protected and owned by European Antennas Limited.
©European Antennas Limited

For further information please contact:

Cobham Antenna Systems, Microwave Antennas
Lambda House, Cheveley,
Newmarket, Suffolk CB8 9RG, UK.
Tel +44 (0)1638 732 177
Fax +44 (0) 1638 731999
Email newmarket.sales@cobham.com