

XPO2V-1650-3000/1354

COBHAM

Omni Antenna

The most important thing we build is trust


Suitable for Multiple Applications

Wide Band


Suitable for Mobile Applications

Mounting Options

Colour Options

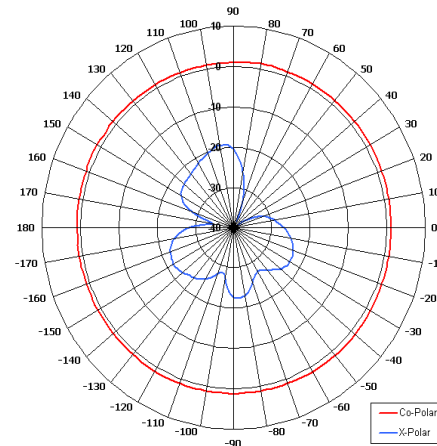


Azimuth Pattern

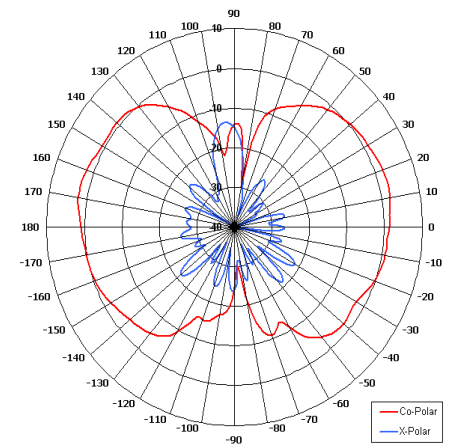

Elevation Pattern

SIDE VIEW

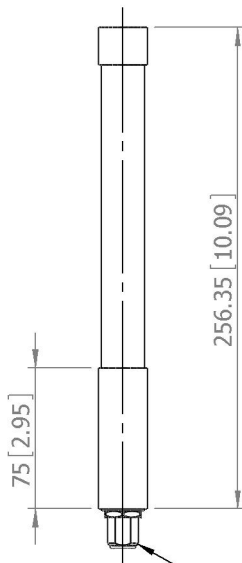

MOUNTED VIA
 ϕ 25.2 [0.99]
 SPIGOT

N(F)
 CONNECTOR

BASE VIEW



GA: 1354

ELECTRICAL

Frequency	1.65 - 3.00 GHz
Gain	2 dBi Nom
Polarisation	Linear (Vertical)
Beamwidth	360° (Az) x 80° (El) Approx
Cross Polar	15-20 dB Typ
VSWR	2:1
Power Rating	50 W
Front to Back	N/A

MECHANICAL

Standard Finish	Desert Tan
Mass	150 g (5.4 oz)
Temperature	-20° to +50°C
Wind Loading	0.9 Kg (2.1 lbs) @ 100mph

MOUNTING OPTIONS

Kits Available	N/A
See separate data sheets	

ADDITIONAL NOTES

Issued 090910

European Antennas Limited trading as Cobham Antenna Systems, Microwave Antennas

European Antennas Limited has a policy of continuous development and stress that the information provided is a guide only and does not constitute an offer or contract or part thereof. Whilst every effort is made to ensure the accuracy of the information contained in this brochure, no responsibility can be accepted for any errors or omissions.

The copyright of antenna designs and images is copyright protected and owned by European Antennas Limited.
 ©European Antennas Limited

For further information please contact:

Cobham Antenna Systems, Microwave Antennas
 Lambda House, Cheveley,
 Newmarket, Suffolk CB8 9RG, UK.
 Tel +44 (0)1638 732 177
 Fax +44 (0) 1638 731999
 Email newmarket.sales@cobham.com