
OA1-0.03-0.50V/2013


Broad Band Omni Antenna

Provisional Specification

The most important thing we build is trust.





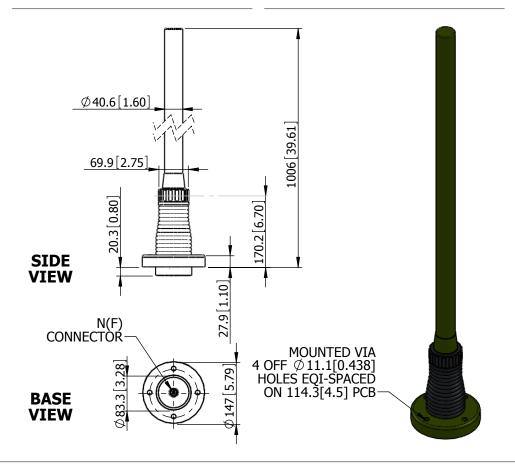

ELECTRICAL

Frequency:	30-88, 118-174, 225-512 MHz	
Gain:	-14 to -6 dBi, 30-88 MHz	
	-4 Typ, 114-174 MHz	
	0 Typ, 225-512 MHz	
Polarisation:	ation: Linear (Vertical)	
VSWR:	: 2.5:1 Approx	
Power Rating:	200 W Max.	
Front to Back:	N/A	
Electrical Tilt:	0°	

MECHANICAL

Standard Finish:	Millitary Green	
Mass:	3.18 Kg / 7.0 lbs	
Temperature:	-40° to +71°C Opperational	
	−55° to +85°C Storage	
Wind Loading:	9.03 Kg/19.8 lbs@100 mph	

MOUNTING OPTIONS

Kits	Available	: 1	IN/A	
See	Separate	Data	Sheet	

GA: 2013-A Issued: 191009 Dimensions: mm [inches] M

For further information please contact:

Cobham Antenna Systems, Microwave Antennas

Lambda House, Cheveley, Newmarket, Suffolk. CB8 9RG, UK Tel +44 (0) 1638 732177 Fax +44 (0) 1638 731999 Email antennasystems.ma@cobham.com

European Antennas Limited trading as Cobham Antenna Systems, Microwave Antennas

European Antennas Limited has a policy of continuous development and stress that the information provided is a guide only and does not consitute an offer or contract or part thereof. Whilst every effort is made to ensure the accuracy of the information contained in this Data Sheet, no responsibilty can be accepted for any errors or omissions.

The copyright of antenna designs and images is copyright protected and owned by European Antennas Limited.

©European Antennas Limited.