




# OA2-0.3-1.0V/1530

Omni Antenna



## Key Features

- Designed for IED Countermeasure Applications
- Wide Band
- High Power
- Rugged
- NATO Mounting Options Available

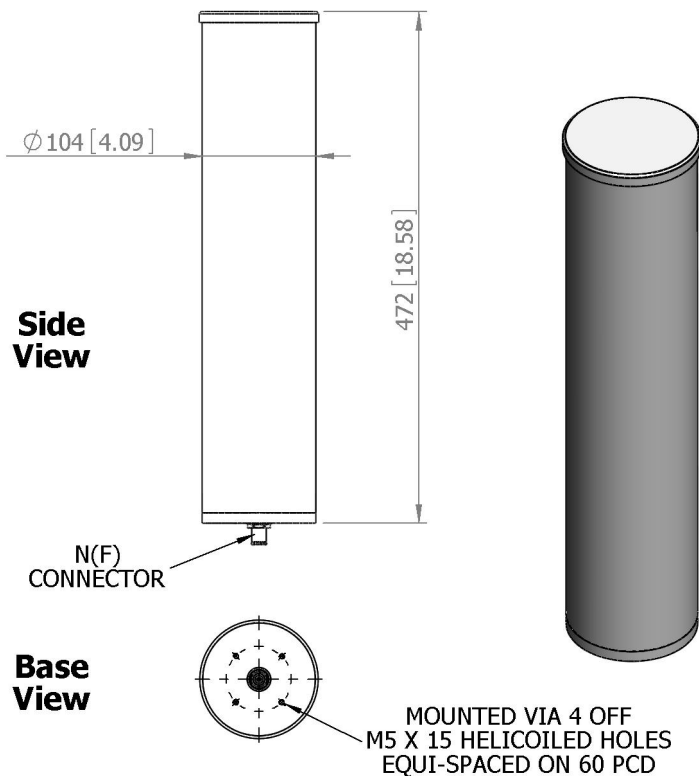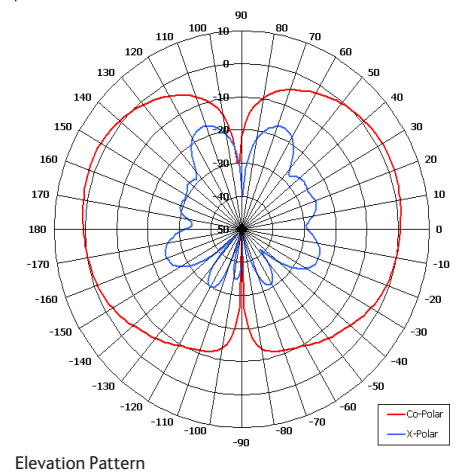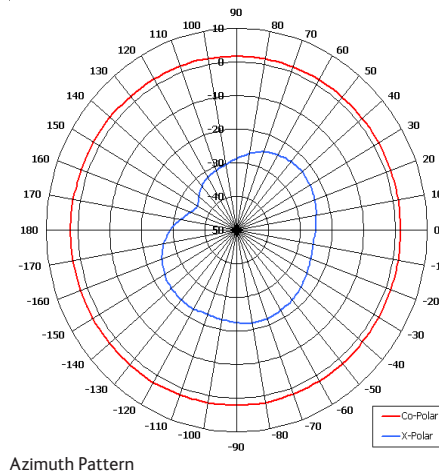

**GA: 1530**

## ELECTRICAL

Frequency	300 - 1000 MHz
Gain	2.0 dBi Typ
Polarisation	Linear (Vertical)
Beamwidth	360° (Az) x 60° (El) Approx
Cross Polar	10 dB Max, >20dB Typ
VSWR	3.5:1 Max, >2:1 Typ
Power Rating	50 W
Front to Back	N/A

## MECHANICAL

Standard Finish	Gloss White
Mass	1.1 Kg/2.42 lbs
Temperature	-40° to +60° C
Wind Loading	7.9 Kg/(17.5 lbs @ 100mph)

## MOUNTING OPTIONS

Kits Available	N/A
See separate data sheets	

## ADDITIONAL NOTES

Issued 050310

Chelton Limited has a policy of continuous development and stress that the information provided is a guide only and does not constitute an offer or contract or part thereof. Whilst every effort is made to ensure the accuracy of the information contained in this brochure, no responsibility can be accepted for any errors or omissions.

The copyright of antenna designs and images is copyright protected and owned by Chelton Limited.  
©Chelton Limited

For further information please contact:  
Chelton Limited,  
Lambda House, Cheveley,  
Newmarket, Suffolk CB8 9RG, UK.  
T: +44 (0)1638 732 177  
E: [newmarket.sales@chelton.com](mailto:newmarket.sales@chelton.com)  
W: [www.chelton.com/microwave](http://www.chelton.com/microwave)