




FPA-0.6-6.0R/1562



Directional Antenna

Key Features

- Designed for DAS Applications
- Ultra Wideband
- Suitable for Indoor Applications
- Lightweight
- Right Hand Circular Polarised

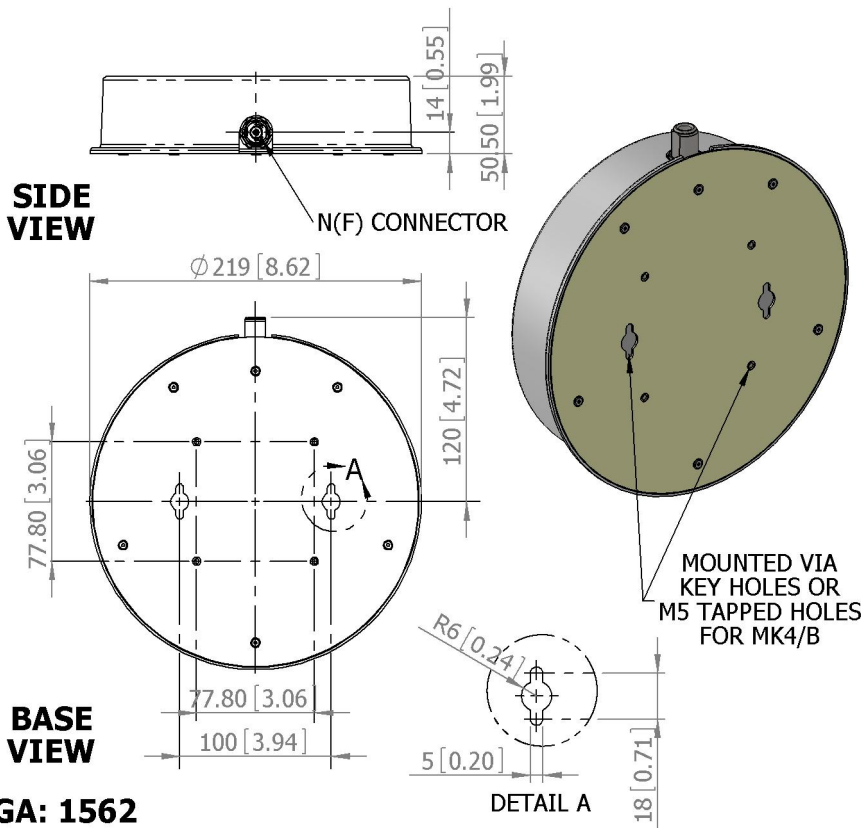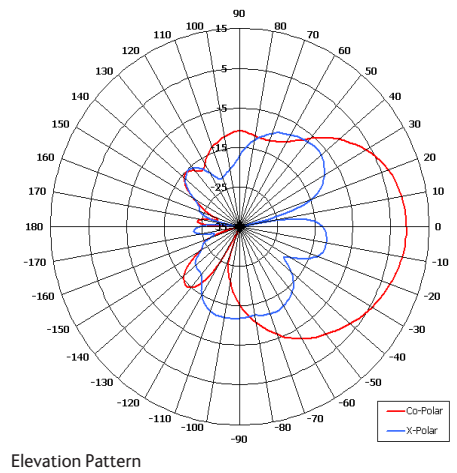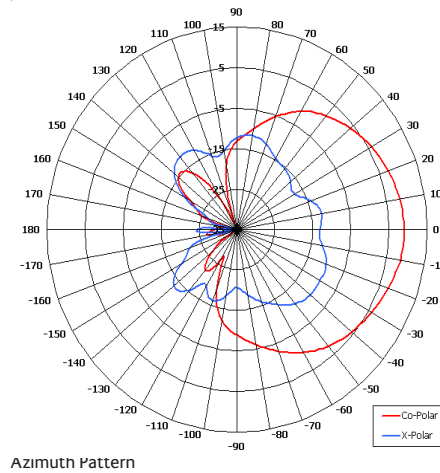

ANTENNA SPECIFICATION

Frequency	0.60 - 6.00 GHz
Gain	See Sheet 2
Polarisation	Right Hand Circular
Beamwidth	See Sheet 2
Axial Ratio	See Sheet 2
VSWR	<2:1 Typ 2.2:1 Worst Case
Power Rating	25 W


MECHANICAL

Standard Finish	Satin White
Mass	420g (1.14 lbs)
Temperature	-20 ° to +50 °C
Wind Loading	6.16 Kg (13.57 lbs) @ 100 mph

FPA-0.6-6.0R/1562



Directional Antenna

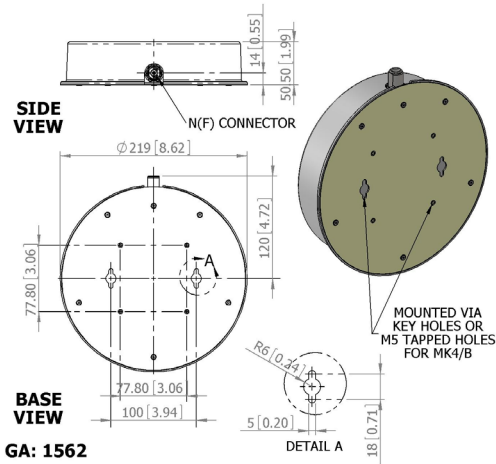

FREQUENCY	0.6 - 1.0 GHz	1.0 - 2.0 GHz	2.0 - 4.0 GHz	4.0 - 6.0 GHz
GAIN	-1.0 0 3.6 dBiC	2.2 - 8.2 dBiC	8.2 - 9.9 dBiC	7.1 - 8.7 dBiC
	1.9 dBiC Typ	5.5 dBiC Typ	9.1 dBiC Typ	7.8 dBiC Typ
AXIAL RATIO	11.1 - 3.5 dB	0.4 - 5.3 dB	0.5 - 1.7 dB	0.2 - 1.7 dB
	7.8 db Typ	2.5 dB Typ	0.9 dB Typ	0.9 dB Typ
AZIMUTH HPBW	60.4 - 85.3 °	45.1 - 87.9°	43.2 - 88.0°	68.0 - 103.9°
	72 ° Typ	62° Typ	66 ° Typ	89 ° Typ
ELEVATION HPBW	56.9 - 79.7 °	56.9 - 84.7°	49.5 - 74.7°	73.3 - 101.6°
	69° Typ	65° Typ	61° Typ	88° Typ

Sheet 2 of 2

Issued 210111

Chelton Limited has a policy of continuous development and stress that the information provided is a guide only and does not constitute an offer or contract or part thereof. Whilst every effort is made to ensure the accuracy of the information contained in this brochure, no responsibility can be accepted for any errors or omissions.

The copyright of antenna designs and images is copyright protected and owned by Chelton Limited.
©Chelton Limited

For further information please contact:
Chelton Limited,
Lambda House, Cheveley,
Newmarket, Suffolk CB8 9RG, UK.
T: +44 (0)1638 732 177
E: newmarket.sales@chelton.com
W: www.chelton.com/microwave