

# OA2-0.2-0.8V/1556



Omni Antenna

## Key Features


Designed for IED Countermeasure Applications

Ultra Wideband


High Power

Suitable for Tactical Comms Applications


NATO Mounting Options Available

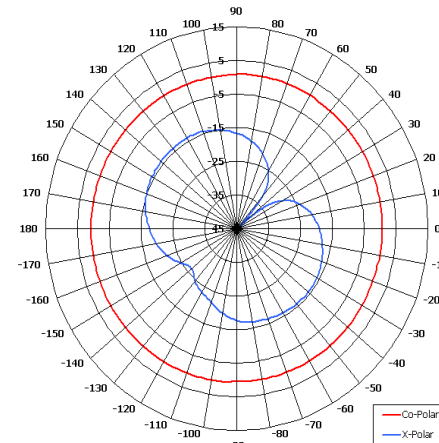

Azimuth Pattern

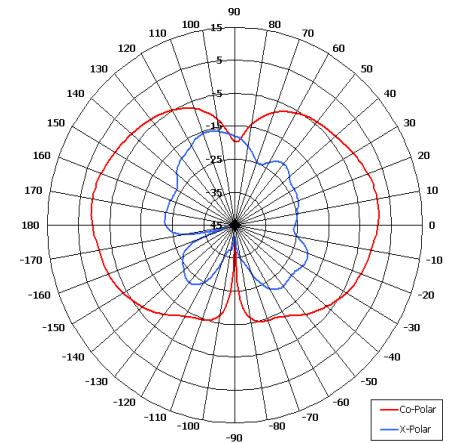

Elevation Pattern

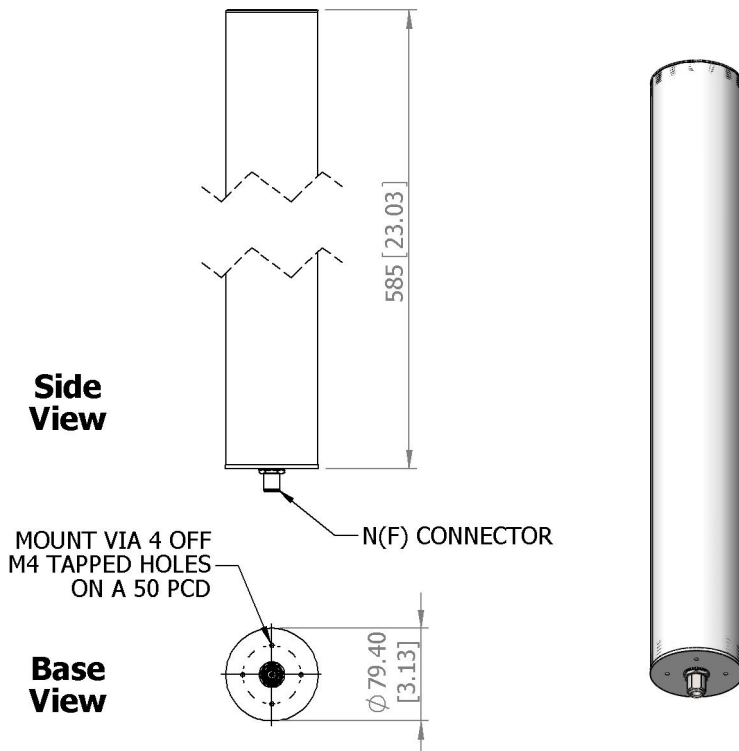

**GA: 1556**

## ELECTRICAL

Frequency	250 - 825 MHz
Gain	-0.60 to 4.70 dBi Nom
Polarisation	Linear (Vertical)
Beamwidth	360° (Az) x 60° (El) Approx
Cross Polar	>15 dB Typ
VSWR	3:6:1 Max. 2.5:1 Typ
Power Rating	50W
Front to Back	N/A

## MECHANICAL

Standard Finish	Grey
Mass	600g/1.32lbs
Temperature	-40° to +60°C
Wind Loading	7.5kg/16.5lbs @ 100mph

## MOUNTING OPTIONS

Kits Available	N/A
See separate data sheets	

## ADDITIONAL NOTES

Issued 290410

Chelton Limited has a policy of continuous development and stress that the information provided is a guide only and does not constitute an offer or contract or part thereof. Whilst every effort is made to ensure the accuracy of the information contained in this brochure, no responsibility can be accepted for any errors or omissions.

The copyright of antenna designs and images is copyright protected and owned by Chelton Limited.  
©Chelton Limited

For further information please contact: Chelton Limited, Lambda House, Cheveley, Newmarket, Suffolk CB8 9RG, UK.  
T: +44 (0)1638 732 177  
E: newmarket.sales@chelton.com  
W: www.chelton.com/microwave