

OA9-4.5V/1566

Vertically Polarised Omni Antenna




Key Features

Designed for Security Applications


High Gain

Low Azimuth Ripple

Suitable for Outdoor Applications

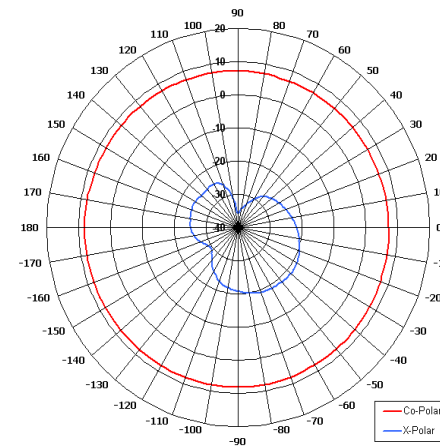


Azimuth Pattern

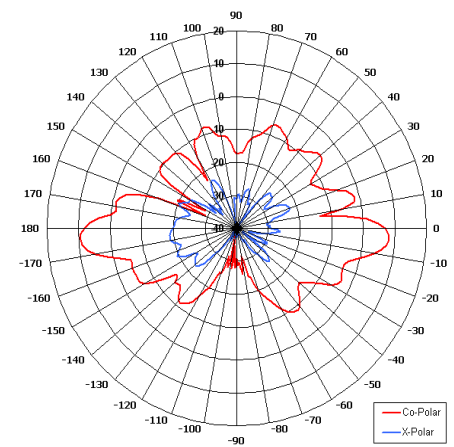


Elevation Pattern

Side View

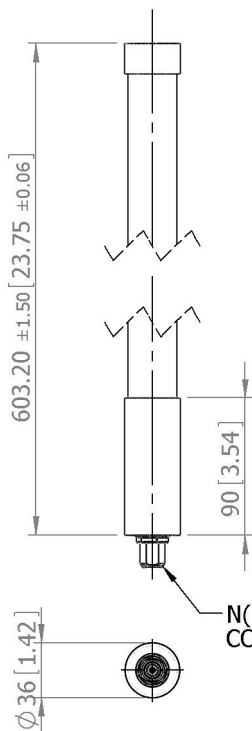

Base View

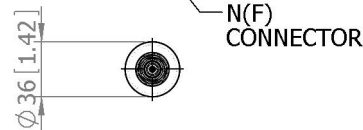

OPTIONAL MOUNTING KIT MK4/A



ELECTRICAL

Frequency	4.30 - 4.70 GHz
Gain	8.2 dBi Typ
Polarisation	Linear (Vertical)
Beamwidth	360° (Az) x 12° (El) Approx
Cross Polar	>25 dB Typ
VSWR	2:1 Max, 1.5:1 Typ
Power Rating	50W
Electrical Tilt	-3.5°

MECHANICAL

Standard Finish	Gloss White
Mass	320g/0.7 lbs
Temperature	-40° to +60°C
Wind Loading	3.2 Kg/7.0 lbs @ 100mph

MOUNTING OPTIONS

Kits Available	MK4/A
See separate data sheets	

ADDITIONAL NOTES

GA: 1566

Issued 200809

Chelton Limited has a policy of continuous development and stress that the information provided is a guide only and does not constitute an offer or contract or part thereof. Whilst every effort is made to ensure the accuracy of the information contained in this brochure, no responsibility can be accepted for any errors or omissions.

The copyright of antenna designs and images is copyright protected and owned by Chelton Limited.
©Chelton Limited

For further information please contact: Chelton Limited, Lambda House, Cheveley, Newmarket, Suffolk CB8 9RG, UK.
T: +44 (0)1638 732 177
E: newmarket.sales@chelton.com
W: www.chelton.com/microwave