

DPA3-2.4V/1611

Body Worn Antenna


Key Features

Designed for Security Applications


Linear Polarisation Pattern -

Bi-Directional

Low Profile Design

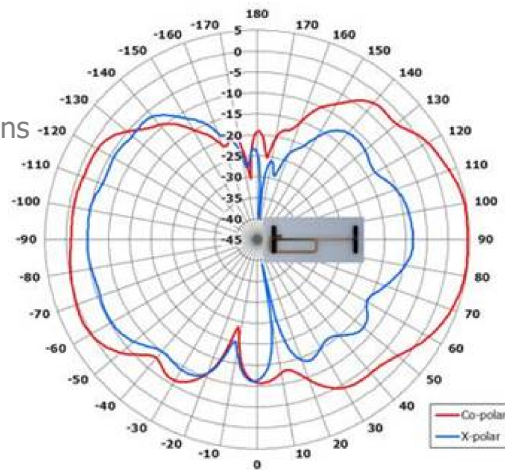


Azimuth Polar Plot

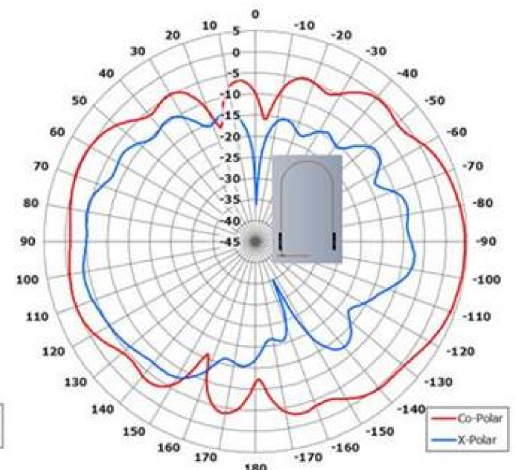


Elevation Polar Plot

TOP VIEW

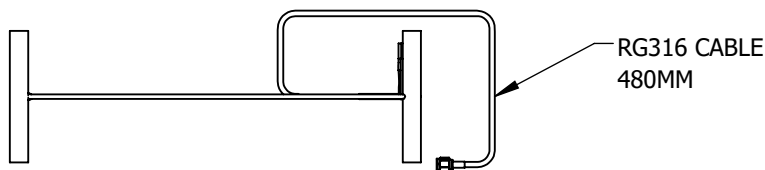

SIDE VIEW

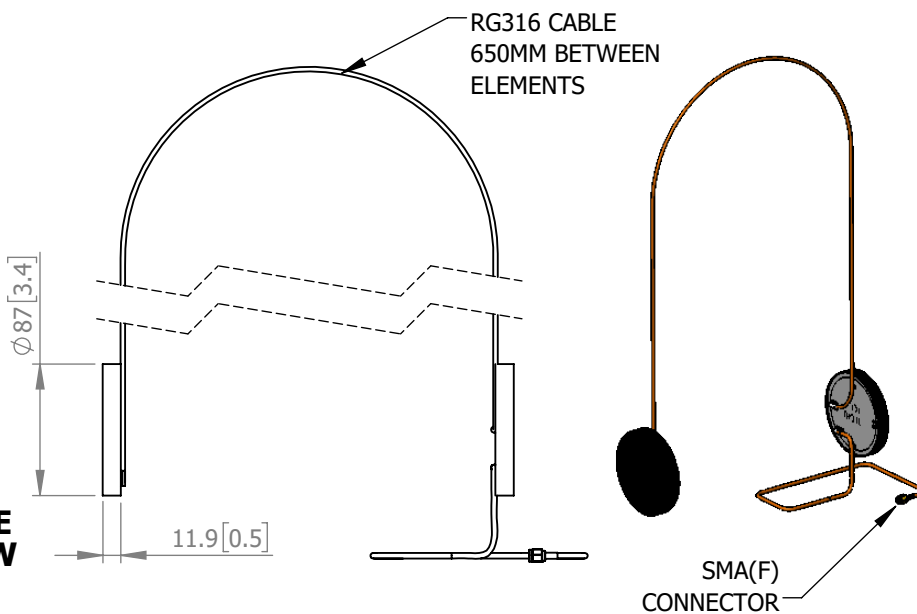

ELECTRICAL

Frequency:	2280 - 2550 MHz
Gain:	2.5 dB Typ. (bi-directional)
Polarisation:	Linear (Vertical)
Beamwidth:	70° (Az) x 70° (El) Typ.
Cross Polar:	>10 dB Typ.
Return Loss:	<-9.5dB
Power Rating:	1 W
Front to Back:	N/A
Electrical Tilt:	N/A

MECHANICAL

Standard Finish:	Matt Black
Mass:	<150g / 5.29 oz
Temperature:	-20° to +50°C
Wind Loading:	N/A

MOUNTING OPTIONS

Kits Available:	N/A
See Separate Data Sheets	

DS:	1611-3	Issued:	010520
Dimensions:	mm [inches]	M	

Chelton Limited has a policy of continuous development and stress that the information provided is a guide only and does not constitute an offer or contract or part thereof. Whilst every effort is made to ensure the accuracy of the information contained in this brochure, no responsibility can be accepted for any errors or omissions.

The copyright of antenna designs and images is copyright protected and owned by Chelton Limited.
©Chelton Limited

For further information please contact: Chelton Limited, Lambda House, Cheveley, Newmarket, Suffolk CB8 9RG, UK.
T: +44 (0)1638 732 177
E: newmarket.sales@chelton.com
W: www.chelton.com/microwave