


# FVD2-0.9V/1635

Flexible Omni Antenna




## Key Features

- Designed for IED Countermeasure Applications Suitable for Manpack Applications
- Suitable for Tactical Comms Applications Rugged
- Ground Plane Independent

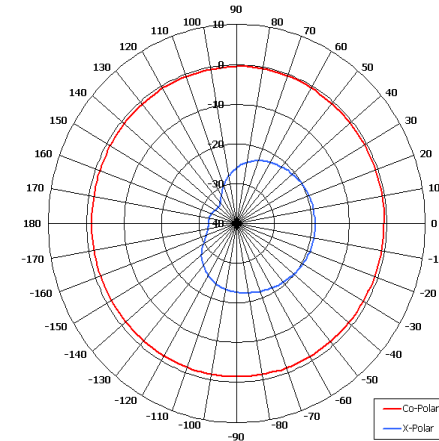


Azimuth Pattern

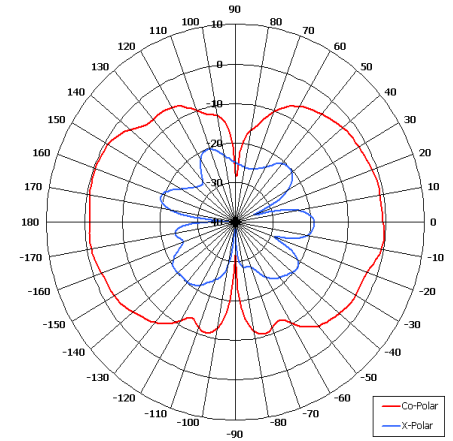

Elevation Pattern

**SIDE VIEW**

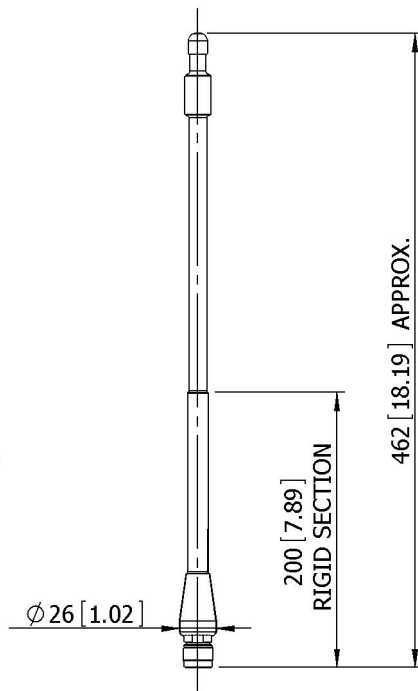

**BASE VIEW**



**GA: 1635**

N(M) CONNECTOR



## ELECTRICAL

Frequency	869- 960 MHz
Gain	0 dBi Nom
Polarisation	Linear (Vertical)
Beamwidth	360° (Az) x 80° (El) Approx
Cross Polar	15 - 20 dB Typ
VSWR	2:1
Power Rating	20 W
Front to Back	N/A

## MECHANICAL

Standard Finish	Matt Black
Mass	180 g (6.3 oz)
Temperature	-20° to +50°C
Wind Loading	N/A

## MOUNTING OPTIONS

Kits Available	N/A
See separate data sheets	

## ADDITIONAL NOTES

Issued 120310

Chelton Limited has a policy of continuous development and stress that the information provided is a guide only and does not constitute an offer or contract or part thereof. Whilst every effort is made to ensure the accuracy of the information contained in this brochure, no responsibility can be accepted for any errors or omissions.

The copyright of antenna designs and images is copyright protected and owned by Chelton Limited.  
©Chelton Limited

For further information please contact: Chelton Limited, Lambda House, Cheveley, Newmarket, Suffolk CB8 9RG, UK.  
T: +44 (0)1638 732 177  
E: newmarket.sales@chelton.com  
W: www.chelton.com/microwave