

Excellence through design Creative in concept

## HARMONIC RADAR ANTENNA

MODEL: HRA-680R-1360L-D1/989


FREQUENCY: 680 & 1360 MHz GAIN: 1 dBiC Nominal

**POLARISATION:** Low Band RHC, High Band LHC **BEAMWIDTH:** 80° (Az.) x 70° (El.) Approx.

AXIAL RATIO: 4 dB Typical VSWR: 2:1
POWER RATING: 300 W @ 1% Duty FRONT TO BACK: 30 dB

**TEMPERATURE**: -20° to +50°C **MASS**: 700g / 1.54 lbs

FINISH: Gold Plated Housing / White Radome WIND LOADING: N/A

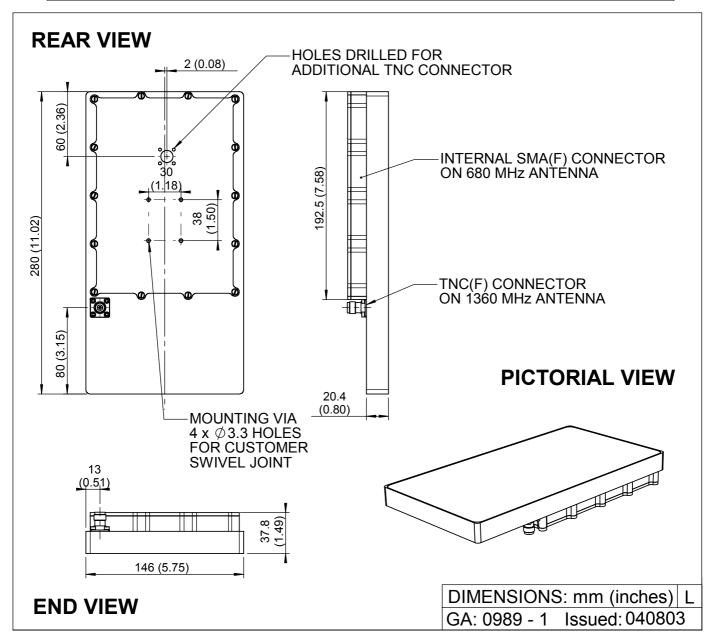

EUROPEAN ANTENNAS LTD.

Tel: +44 (0)1638 731888 Fax: +44 (0)1638 731999

LAMBDA HOUSE, CHEVELEY NEWMARKET, SUFFOLK, CB8 9RG, UNITED KINGDOM E-Mail: sales@european-antennas.co.uk Website: www.european-antennas.co.uk

European Antennas Ltd. has a policy of continuous developement and therefore stress that the data contained on this sheet should be used for guidance only.