

SVD2-2.3V/1779

COBHAM

Omni Antenna

The most important thing we build is trust

Designed for Security Applications


Suitable for Multiple Applications

Wide Band


Vertical Polarisation

Low Profile

Connector Options

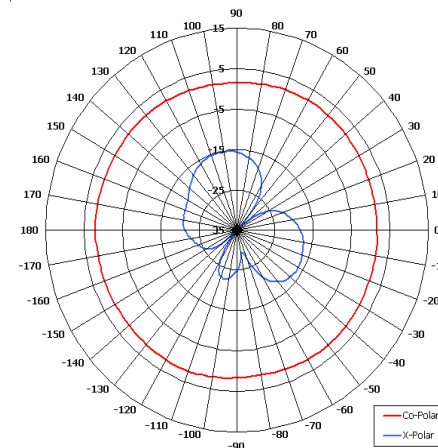


Azimuth Pattern

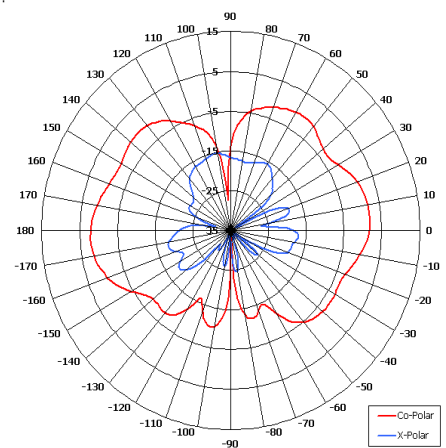


Elevation Pattern

**SIDE
VIEW**

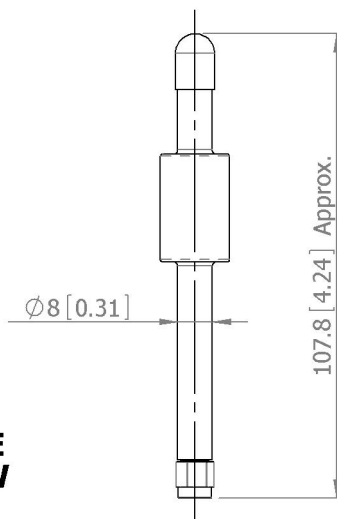

**BASE
VIEW**



SMA(M)
CONNECTOR

GA: 1779

ELECTRICAL

Frequency	2.00 - 2.50 GHz
Gain	2 dBi Nom
Polarisation	Linear (Vertical)
Beamwidth	360° (Az) x 80° (El) Approx
Cross Polar	15 dB Typ
VSWR	2:1
Power Rating	10 W
Front to Back	N/A
Electrical Tilt	N/A

MECHANICAL

Standard Finish	Matt Black
Mass	21g (0.5 oz)
Temperature	-20° to +50°C
Wind Loading	N/A

MOUNTING OPTIONS

Kits Available	N/A
See separate data sheets	

ADDITIONAL NOTES

Issued 261110

European Antennas Limited trading as Cobham Antenna Systems, Microwave Antennas

European Antennas Limited has a policy of continuous development and stress that the information provided is a guide only and does not constitute an offer or contract or part thereof. Whilst every effort is made to ensure the accuracy of the information contained in this brochure, no responsibility can be accepted for any errors or omissions.

The copyright of antenna designs and images is copyright protected and owned by European Antennas Limited.
©European Antennas Limited

For further information please contact:

Cobham Antenna Systems, Microwave Antennas

Lambda House, Cheveley,
Newmarket, Suffolk CB8 9RG, UK.

Tel +44 (0)1638 732 177

Fax +44 (0) 1638 731999

Email newmarket.sales@cobham.com