

FPA18-2.6L/1735

Flat Panel Antenna



Key Features

Designed for WiMAX/LTE


Applications

Suitable for Outdoor Applications


Pattern - Directional

Left Hand Circular Polarised


Rugged

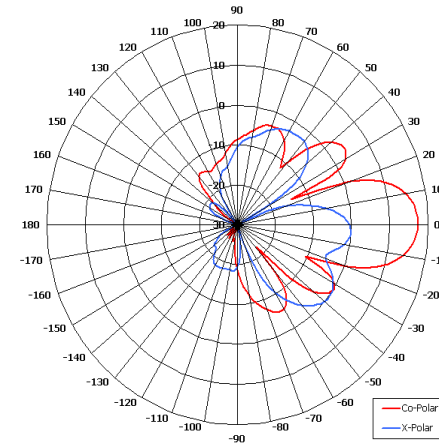

Azimuth Pattern

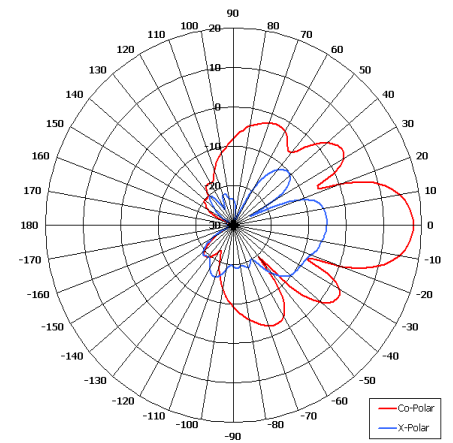

Elevation Pattern

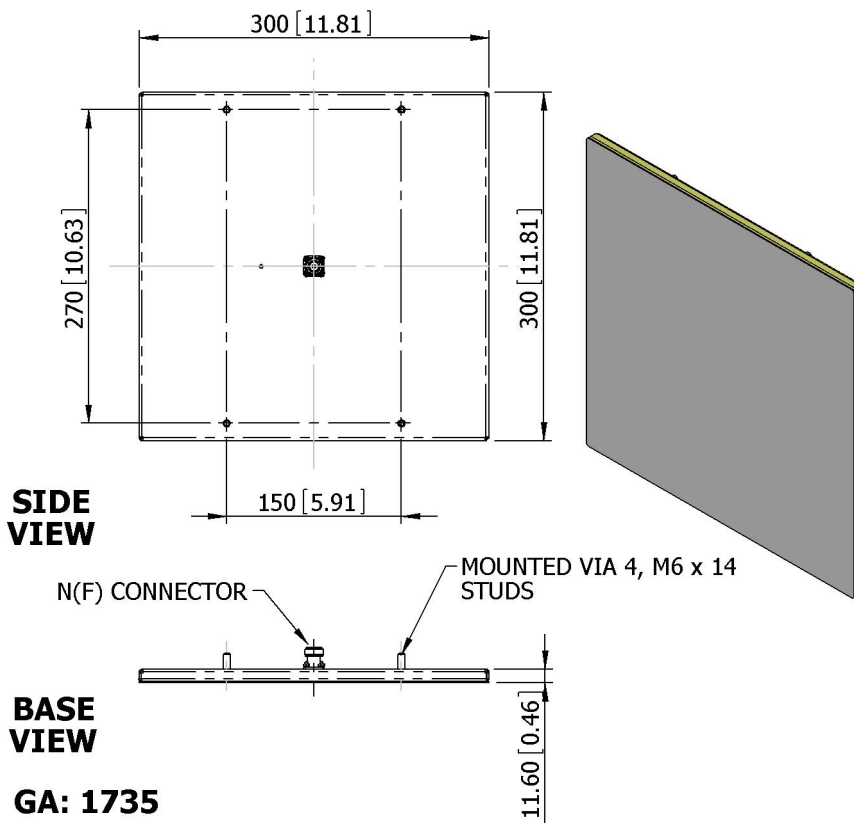

ELECTRICAL

Frequency	2.40 - 2.70 GHz
Gain	17.7 dBiC Nom
Polarisation	Left Hand Circular
Beamwidth	20° (Az) x 20° (El) Approx
Axial Ratio	<2 dB Typ
VSWR	1.5:1
Power Rating	50 W
Front to Back	>30 dB
Electrical Tilt	0°

MECHANICAL

Standard Finish	Gloss White (Alocrom 1200)
Mass	1.0 Kg (2.2 lbs)
Temperature	-20° to +50°C
Wind Loading	14.6 Kg (32.12 lbs) @ 100mph

MOUNTING OPTIONS

Kits Available	None
See separate data sheets	

ADDITIONAL NOTES

Issued 060810

Chelton Limited has a policy of continuous development and stress that the information provided is a guide only and does not constitute an offer or contract or part thereof. Whilst every effort is made to ensure the accuracy of the information contained in this brochure, no responsibility can be accepted for any errors or omissions.

The copyright of antenna designs and images is copyright protected and owned by Chelton Limited.
©Chelton Limited

For further information please contact: Chelton Limited,
Lambda House, Cheveley,
Newmarket, Suffolk CB8 9RG, UK.
T: +44 (0)1638 732 177
E: newmarket.sales@chelton.com
W: www.chelton.com/microwave