

OA2-0.2V/1516



Omni Antenna


The most important thing we build is trust

Designed for Unmanned Systems Applications


Suitable for Military Applications

Rugged


Colour Options

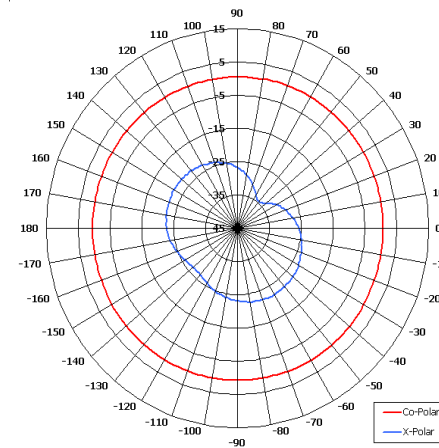

Azimuth Pattern

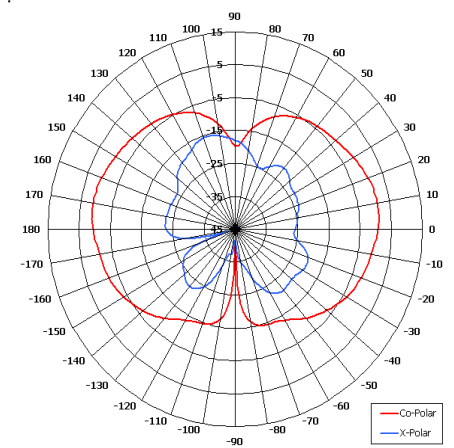

Elevation Pattern

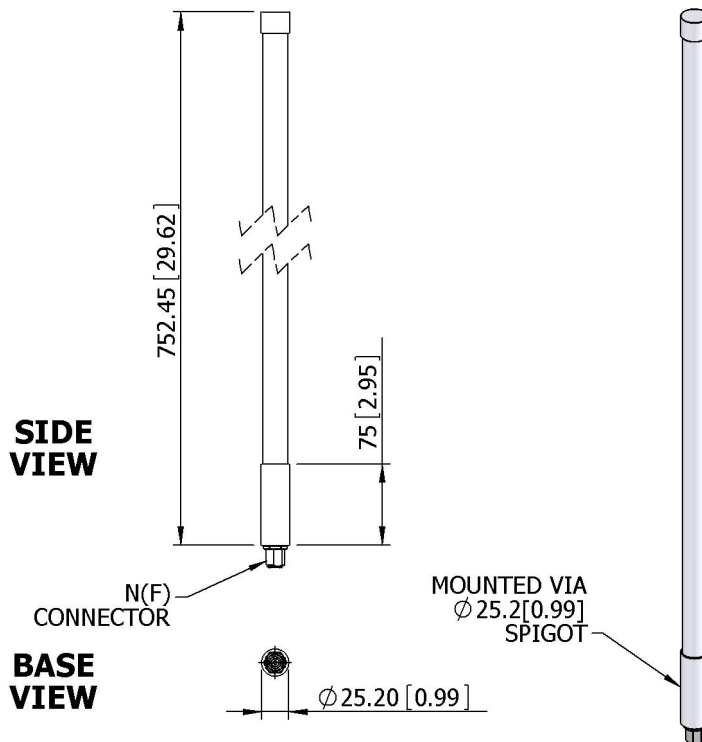

GA: 1516

ELECTRICAL

Frequency	233 - 239 MHz
Gain	2 dBi Nom
Polarisation	Linear (Vertical)
Beamwidth	360° (Az) x 75° (El) Approx
Cross Polar	15 dB Typ
VSWR	2.5:1
Power Rating	40 W
Front to Back	N/A

MECHANICAL

Standard Finish	Gloss White (RAL 9910)
Mass	<300 g (10.7 oz)
Temperature	-40° to +60°C
Wind Loading	2.8 Kg (6.1 lbs) @ 100mph

MOUNTING OPTIONS

Kits Available	N/A
See separate data sheets	

ADDITIONAL NOTES

Issued 090910

European Antennas Limited trading as Cobham Antenna Systems, Microwave Antennas

European Antennas Limited has a policy of continuous development and stress that the information provided is a guide only and does not constitute an offer or contract or part thereof. Whilst every effort is made to ensure the accuracy of the information contained in this brochure, no responsibility can be accepted for any errors or omissions.

The copyright of antenna designs and images is copyright protected and owned by European Antennas Limited.
©European Antennas Limited

For further information please contact:

Cobham Antenna Systems, Microwave Antennas

Lambda House, Cheveley,

Newmarket, Suffolk CB8 9RG, UK.

Tel +44 (0)1638 732 177

Fax +44 (0) 1638 731999

Email newmarket.sales@cobham.com