OA4-5.7V/2417

Omni Antenna



Key Features


Omni Directional

Vertical Polarisation

Design for Security Applications


Suitable for Outdoor Applications

Rugged



Azimuth Polar Plot

Elevation Polar Plot

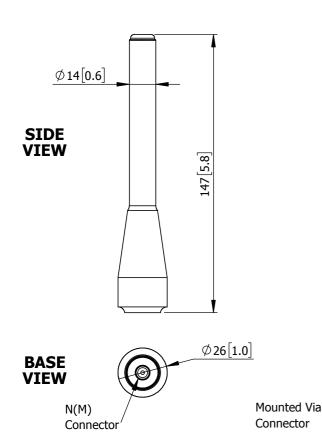

ELECTRICAL

rrequency:	5.4 - 6.0 GHZ
Gain:	4.5 dBi Nom.
Polarisation:	Linear (Vertical)
Beamwidth:	360° (Az) x 35° (El)
Cross Polar:	>25 dB Typ.
VSWR:	2:1 Max, <1.5:1 Typ.
Power Rating:	30 W
Front to Back:	N/A

MECHA NICA L

Standard Finish:	Blue
Mass:	50g / 1.8 oz
Temperature:	-40° to +60°C
Wind Loading:	0.4 Kg / 0.9 lbs @ 100 mph

MOUNTING OPTIONS

Kits Available: N/A
See Separate Data Sheets

DS: 2417-1 Issued: 290817 Dimensions: mm [inches] M

Chelton Limited has a policy of continuous development and stress that the information provided is a guide only and does not constitute an offer or contract or part thereof. Whilst every effort is made to ensure the accuracy of the information contained in this brochure, no responsibility can be accepted for any errors or omissions.

The copyright of antenna designs and images is copyright protected and owned by Chelton Limited. ©Chelton Limited

For further information please contact: Chelton Limited, Lambda House, Cheveley, Newmarket, Suffolk CB8 9RG, UK. T: +44 (0)1638 732 177 E: newmarket.sales@chelton.com W: www.chelton.com/microwave